

In Situ Temperature Measurement Test Report

For

LIGHT EFFICIENT DESIGN

(Brand Name:N/A)

188 S. Northwest Highway Cary, IL 60013

LED Lamp

Model name(s): LED-8036MXX-A

Remark : The letter “XX” on the model name represents the color temperature, “40” stand for 4000K, “57” stand for 5700K.

Representative (Tested) Model: LED-8036M40-A

Model Different: N/A

Test & Report By:

Jack Luo

Engineer: Jack Luo

Date:May.31,2016

Review By:

Tommy Liang

Manager: Tommy Liang

Note: This report does not imply product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Laboratory: Standard-Tech Co. Ltd Testing Center

NVLAP CODE: 201011-0

Report Format Number STD/QR4918-A/0

Address : Standard-Tech Building, No.6 Guanhong Road,Guangzhou Science City, Guangzhou 510663, China

Tel: 8620-3229 0320

Fax: 8620-32290422

<http://www.standard-tech.com>



Table of Contents

1 General 3

 1.1 Product Information 3

 1.2 Standards or methods 4

 1.3 Equipment list 4

2 Test conducted and method 4

 2.1 Ambient Condition 4

 2.2 Temperature Stabilization 4

 2.3 Thermocouples 5

 2.4 Thermocouples contact 5

3 Test Results 6

 3.1 Test Data: 错误!未定义书签。

 3.2 Test Photo: 6

 3.3 Test Data of LED Driver: 错误!未定义书签。


 3.4 Test Photo: 错误!未定义书签。

1 General

1.1 Product Information

| | |
|--------------------------|--|
| Brand Name | N/A |
| Model Number | LED-8036MXX-A |
| Luminaire Type | LED Lamp |
| Nominal Power | 100W |
| Rated Initial Lamp Lumen | -- |
| Declared CCT | 4000K,5700K |
| LED Manufacturer | Guangzhou Hongli Opto-Electronic Co., Ltd. |
| LED Model | HL-A-2835HW-S1-08-HR3 |
| Sample Receipt Date | Apr.01,2016 |
| Sample Number | GZE160347-K1 |

Photo

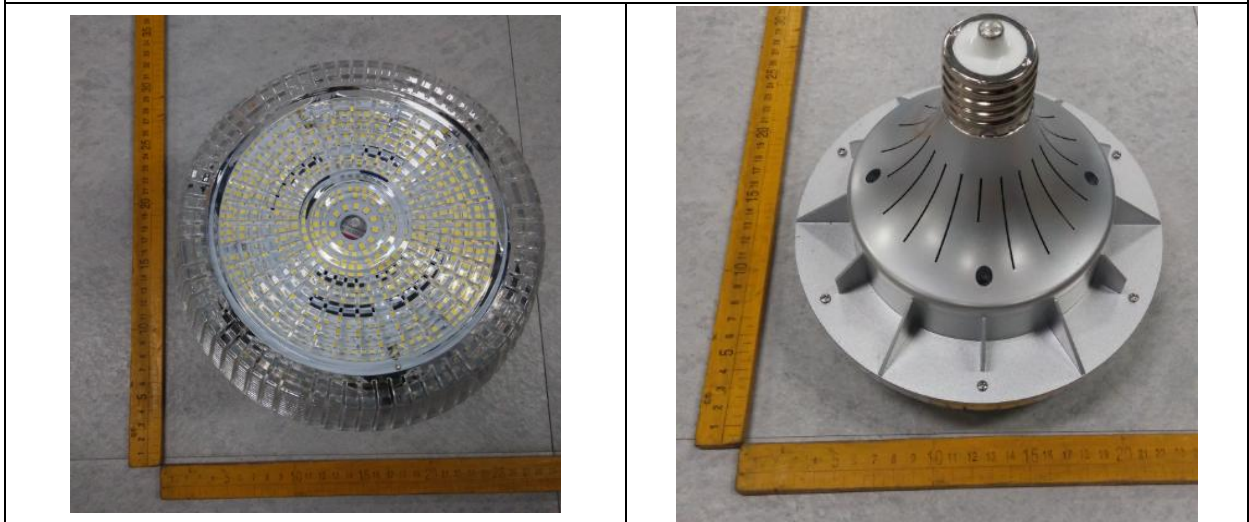

1.2 Standards or methods

The following standards are partly or totally used or referenced for test:

| No. | Name |
|-------------------|------------|
| ANSI/UL 1598:2008 | Luminaires |

1.3 Equipment list

| Equipment ID | Equipment Name | Last Calibration Date | Next Calibration Date |
|--------------|--------------------|-----------------------|-----------------------|
| PF210 | Power Meter | 2015-07-01 | 2016-06-30 |
| ST-R-181A | Temperature Tester | 2015-07-01 | 2016-06-30 |

2 Test conducted and method

2.1 Ambient Condition

Test was conducted in an ambient temperature of $25\pm 5^{\circ}\text{C}$. Ambient temperature variations above or below 25°C was subtracted from or added to temperatures recorded at points on the luminaire.

The ambient temperature was measured by a thermocouple which was immersed in 15ml of mineral oil in a glass container.

2.2 Temperature Stabilization

Temperatures were measured after they have stabilized when the test has been running for a minimum of 7.5 hours, or the test has been running for a minimum of 3 hours and three successive reading taken at 15 minutes intervals are with 1°C of another and are not rising.

2.3 Thermocouples

Type J thermocouple was used for temperature measurement. The thermocouple was 0.05mm²(30AWG), and complied with the requirements specified in ASTM MNL 12 and limits of error specified in NIST ITS 90 and ISA MC96.1.

2.4 Thermocouples contact

Thermocouples were in contact with the TMP LED location described in LM-80 test report. In order to gain the maximum temperature, if appropriate, more than one thermocouple were contact in these locations. For details information, please refer to clause 3.3 for the photo of thermocouple contact.

3 Test Results


| | | | |
|-------------------------|------------------|--|---------|
| Test date | 2016-04-24 | Test Ambient | 25.1 °C |
| Sample No. | | LED Package Model | |
| GZE160347-K1 | | HL-A-2835HW-S1-08-HR3 | |
| LED driver of Each Lamp | Output voltage V | Measured LED working current (Max.) mA | |
| 1 | 46.2 | 50.3 | |

3.1 Test Data:


| Input Vol. | 120.0V | Input Current | 0.8392A | Input Wattage | 96.55W | Temperature stabilization time: | 500 min | |
|--|------------------|-------------------|---------|------------------|-------------------|---------------------------------|------------------|-------------------|
| No. | Temperature (°C) | | No. | Temperature (°C) | | No. | Temperature (°C) | |
| | Measured | Corrected at 25°C | | Measured | Corrected at 25°C | | Measured | Corrected at 25°C |
| 1 | 50.3 | 50.2 | 3 | 50.8 | 50.7 | 5 | 50.5 | 50.4 |
| 2 | 51.1 | 51.0 | 4 | 49.6 | 49.5 | 6 | 49.9 | 49.8 |
| The highest in-situ measured temperature LED is 51.0°C | | | | | | | | |

3.2 Test Photo:

Ts Position:

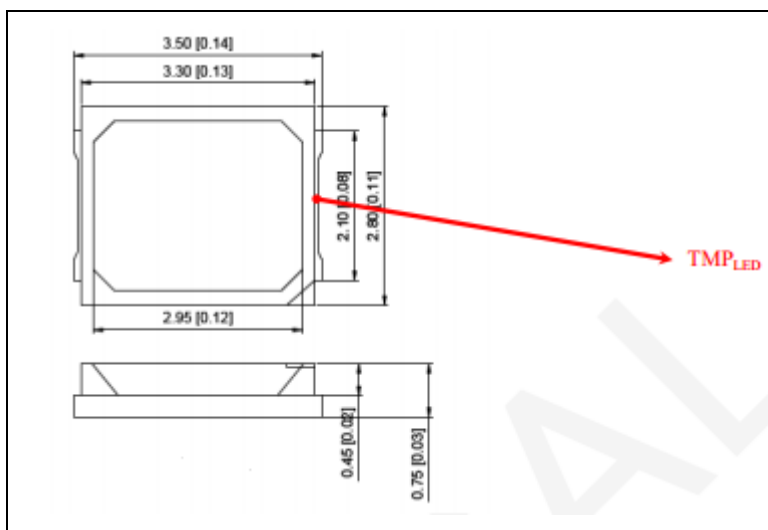

Thermocouple Location on Temperature Measurement Point (TMP):

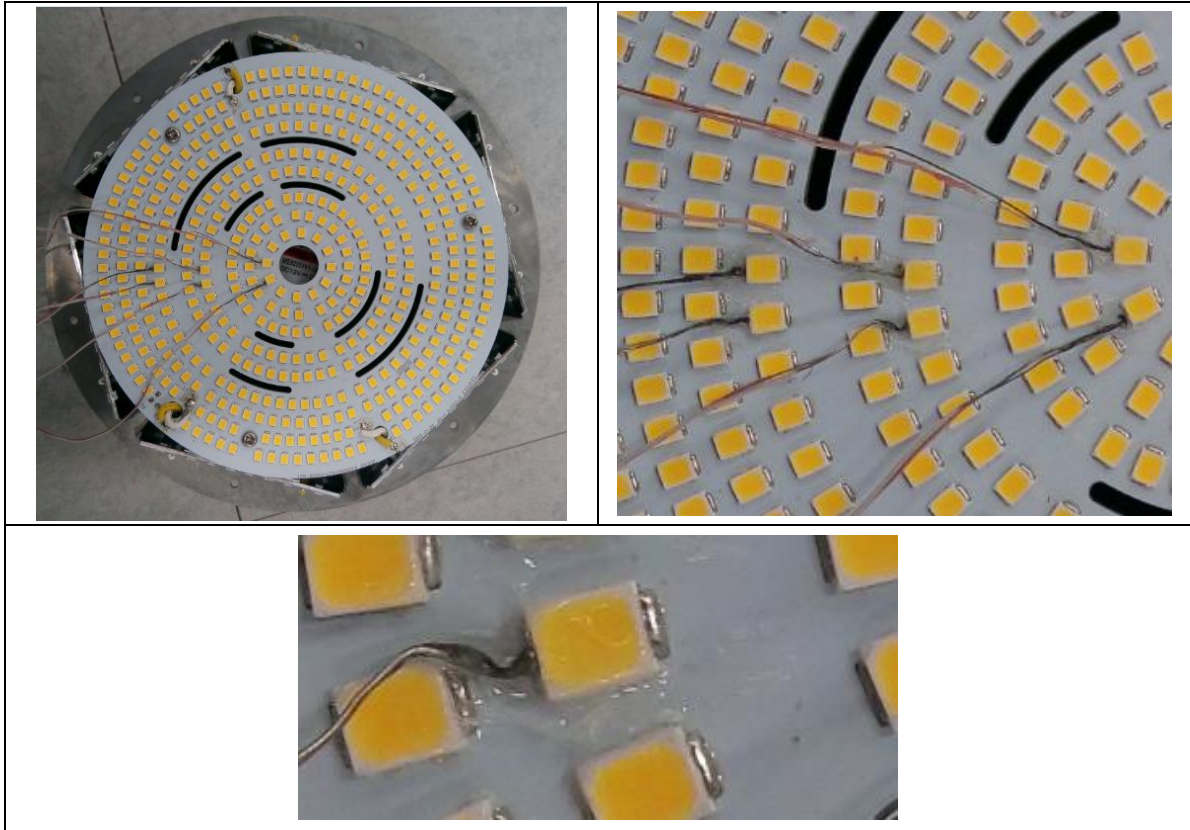

Results

| | |
|--|--------|
| Time (t) at which to estimate lumen maintenance (hours): | 36,000 |
| Lumen maintenance at time (t) (%): | 82.93% |
| Reported L70 (hours): | >54000 |

***** END OF THE TEST REPORT*****

Laboratory: Standard-Tech Co. Ltd Testing Center

NVLAP CODE: 201011-0

Report Format Number STD/QR4918-A/0

Address : Standard-Tech Building, No.6 Guanhong Road,Guangzhou Science City, Guangzhou 510663, China

Tel: 8620-3229 0320

Fax: 8620-32290422

<http://www.standard-tech.com>