

# LED-7312-XXA GX23 2 Pin GEN 3 Universal



## Models

LED-7312-XXA, 120-277VAC, ULus, 2700K, 3500K, & 4000K CCT



## Features


- 7 Watts Replaces up to 26w flourescent or PL Lamps
- 120° Beam Angle
- UL damp environments (USA & Can)
- GX23-2 2 Pin Base
- >25,000 rated LED life
- 5 year limited warranty (see website for details)
- Compatible with 12/18W Magnetic Ballast or 120-277VAC Line Voltage \*Not Approved for Enclosed Fixtures



## Technical Specifications

Models US/CAN	LED-7312-27A	LED-7312-35A	LED-7312-40A
CCT	2700K	3500K	4000K
Power Consumption	7 watts		
Ballast Replacement	12/18W 2 Pin PL MAGNETIC BALLAST		
Direct Line	120-277VAC		
Mounting	GX23-2		
LED Type			
Beam Angle	120° / Horizontal		
Dimmable	No		
Operating Temp	-40°F - +122°F		
Rated R70 Life	>25,000 Hrs.		
Warranty	5 Year Limited*		

## Lux Distance Curve

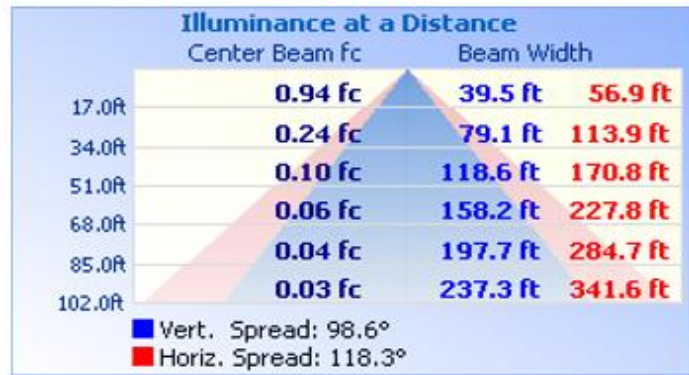

LM79 Specifications	Yes	Yes	Yes
Power (W)	6.75	6.97	6.96
CCT	2583	3382	3837
Light Output	801.5	899.66	914.2
Efficacy	118.7	129	131.4
THD @ 277V	18.59	18.02	18.22
PF @ 277V	0.902	0.9032	0.904
CRI:	81.9	84.9	84
R9	6	18	15
Duv	0.0009	-0.001	0.002
Packaging	12 / Master Carton		
Unit	5.75" X 1.374"	0.40	
Master	17.3" X 17.3" X 7"		

LED Power Consumption (Watts)	HID Power Consumption (Watts)	HID Ballast Power Consumption (Watts)	Total Savings (Watts)	Annual Energy Savings (14 hrs/day)	Lifetime Energy Savings (over 50,000 hrs)
7	18	4	15	\$8	\$82.50

Mounting Orientation			Minimum Fixture Size Requirements (inches)	
Base Up	Base Down	Horiz	Length	TBD
			Width	TBD
			Height	TBD
			Cu. Inches	#VALUE!
Approved    Approved    Approved				



188 S. Northwest Highway • Cary, IL 60013  
 (847) 380-3540 • FAX: (847) 380-3542  
 www.led-llc.com